


# HEAVY DUTY JACKING CATALOGUE

## AIR/HYDRAULIC JACKS



Double Spring Return

Includes Three Adapter Set and Holder

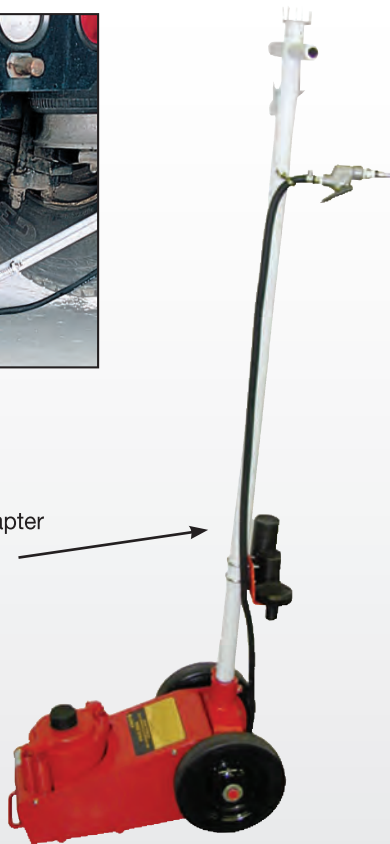

### 22 TONNE

- Air/Hydraulic Jack
- Double Spring Return
- One Piece Handle
- 81/4" Low Height

Includes additional three adapters and holder. Ideal for tire and wheel service on trucks, tractors, and OTR vehicles. Long 50" one piece handle locks in three positions for easy handling. 8" wheels for easy movement. Min. height 81/4", max. height 183/8", chassis length 201/2".

Part no	Description	lbs	kg
1000934	22-Ton Air/Hydraulic Jack	98	44

## ALUMINIUM JACKS



### IMT 55 & 100 TONNE

Jack/Rams are suited for almost every heavy lifting situation, in the shop or on the job-site. Use with any 10,000 psi air over hydraulic pump with appropriate couplers.

Part no	Capacity	Height		Ship Weight	
	Tons	Min	Ext	lbs	kg
10005413	55	12"	18"	25	11
10005397	55	16"	26"	41	19
10005398	100	12"	18"	55	25
10005383	Optional 5 Qt. Air/Hyd.Pump & Hose			22	16



### ESCO 55 & 100 TONNE

Jack/Rams are suited for almost every heavy lifting situation, in the shop or on the job-site. Can be used with any 10,000 psi air over hydraulic pump (with appropriate couplers). Both models include a shut-off valve. 55-ton model has a 7" x 7" base.

Part no	Capacity	Height		Ship Weight	
	Tons	Low	High	Low	High
10005411	55	10 7/8"	17 1/2"	30	13
1000935	100 61/2" Stoke	11 1/4"	17 3/4"	40	19
10005395	Optional 8 Qt. Air/Hyd.Pump & Hose			36	16