

HEAVY DUTY JACKING CATALOGUE

PORTABLE ALUMINIUM JACK

Safety

Automatic load holding G/
Lowering valve, locks in place

16"/40cm Stroke >

28"71cm Retracted Height >

Up to 40"/101cm retracted height
using extensions & holding rings. >


155lb / 70kg without saddle >

Flexible - can be used as
wheel jack with Modu-lift pump. >


110 volt electric/hydraulic
plugs into any welder. >

High Strength
Aluminium Alloy Base >

15.5" Base Diameter >

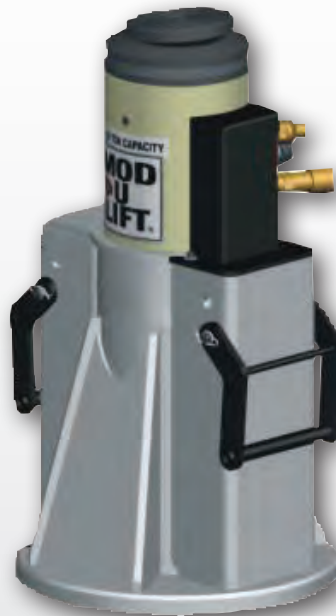

Tonnage	Stroke		Closed Height		Extend Height		4"(101mm) Base Ext		4" (101mm) Ext + 4" (101mm) Base Ext		8" (203mm) Ext + 4" (101mm) Base Ext		16" (406mm) Ext + 4" (101mm) Base Ext	
	A	A	B	B	C	C	D	D	E	E	F	F		
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm		
90														

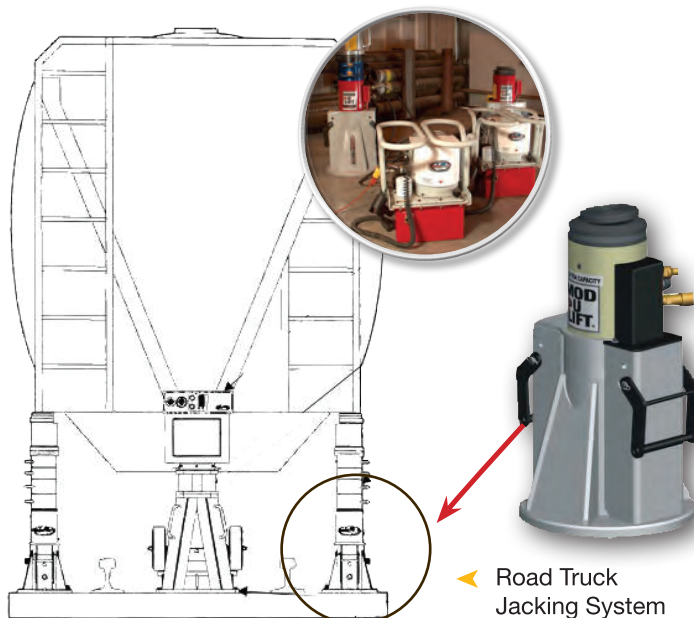

Road Truck Jacking System

Part number	Description
1000832	Lift Module, 100 Tonne 16"stroke Aluminium
1000632	Portable Pump, Electric
1000633	Portable Pump, Electric with manifold
1000668	Load Holding Ring Set 100T 16" Stroke
1000665	Load Holding Ring, 100T-2"
1000666	Load Holding Ring, 100T - 3"
1000667	Load Holding Rings, 100T - 5"
100068	Extension, Steel Base 100T*
1000648	Swivel Saddle, 100T
1000681	Extension Adaptor 100 Tonne- 4"
1000682	Extension Adaptor 100 Tonne - 8"
1000683	Extension Adaptor, 100 Tonne - 16"

* Required when using extensions